


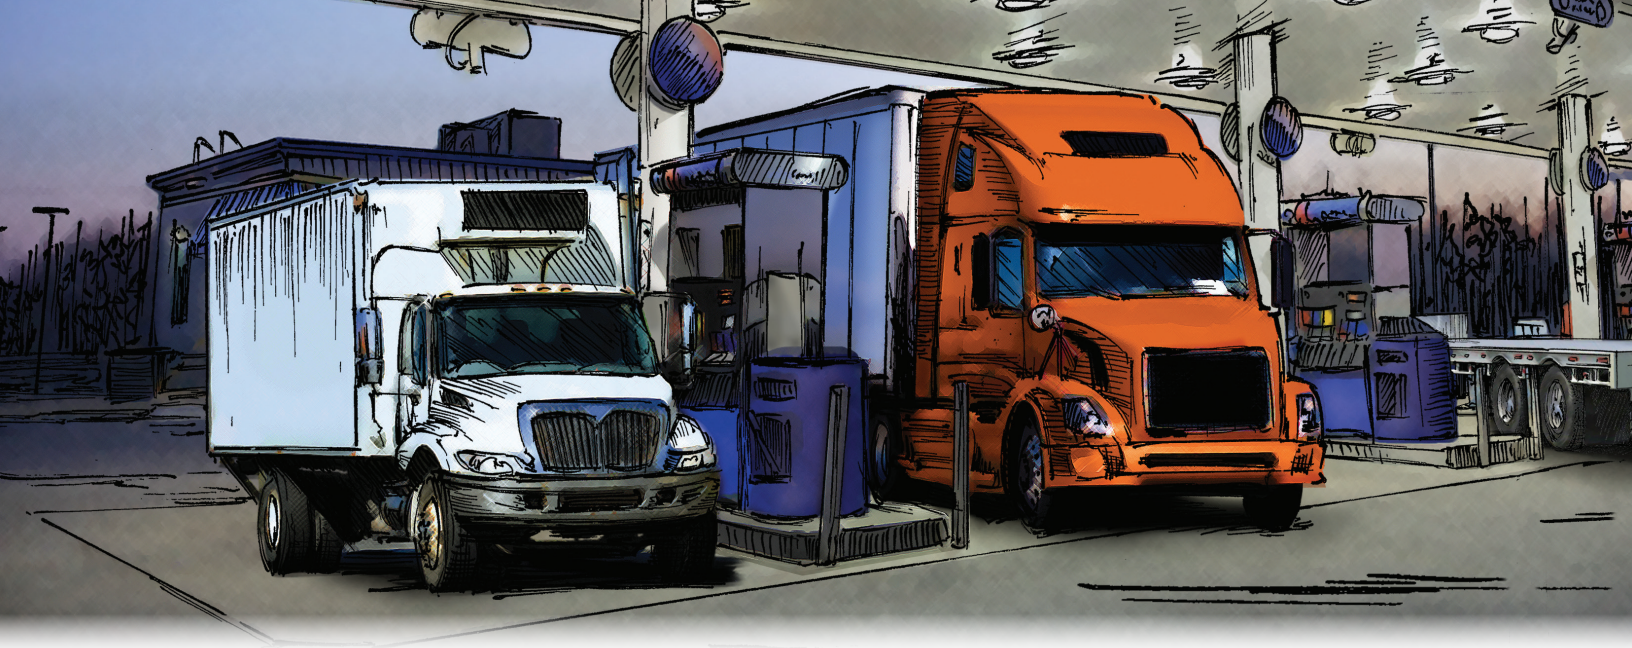


# ST717 All-Position Rib

This line offers many hard to find sizes and ply ratings. Every tire is engineered to be Sumitomo tough.

## FEATURES & BENEFITS

- Sumitomo four steel belt casing construction resists punctures, increases vehicle stability and contributes to more retread cycles.
- Application specific tread compound resists the effects of scuffing from sharp turns and promotes long mileage.
- 5-rib design provides better vehicle stability in all weather conditions.



| Product Code | Tire Size | Service Desc. | Load Range / Ply | Pref Rim Width (inch) | Min Rim Width (inch) | Single Max Load (lbs) | Dual Max Load (lbs) | I.P. (psi) | Overall Diameter (inch) | Section Width (inch) | Min Dual Spacing (inch) | Tread Depth (X/32") | Static Loaded Radius (inch) | Revs Per Mile | Max Speed (mph) |
|--------------|-----------|---------------|------------------|-----------------------|----------------------|-----------------------|---------------------|------------|-------------------------|----------------------|-------------------------|---------------------|-----------------------------|---------------|-----------------|
| 5530438      | 9R17.5    | 129/127K      | G/14             | 6.75                  | 6.00                 | 4,080                 | 3,860               | 120        | 33.1                    | 8.9                  | 10.3                    | 16                  | 15.4                        | 632           | 68              |
| 5530442      | 11R17.5   | 137/135K      | G/14             | 8.25                  | 7.50                 | 5,070                 | 4,805               | 105        | 36.4                    | 11.7                 | 12.6                    | 17                  | 16.7                        | 582           | 68              |
| 5530426*     | 13/80R20  | 153/149K      | J/18             | 9.00                  | 8.50                 | 8,050                 | 7,160               | 110        | 41.2                    | 12.5                 | 14.5                    | 19                  | 19.2                        | 506           | 68              |
| 5530429*     | 14/80R20  | 157K          | J/18             | 10.00                 | 9.00                 | 9,090                 | -                   | 120        | 43.0                    | 13.5                 | -                       | 20                  | 19.8                        | 491           | 68              |

\* Includes tube and flap

Every effort has been made to verify the accuracy of the listed specifications. TBC Corporation and TBC Brands cannot be held responsible for any discrepancies, and as such, the information should be considered as approximate.



# SUMITOMO TIRES

*For what drives you.*

sumitomotrucktires.com • treadxpress.com • 1-866-822-4968