

HTR ENHANCE CX2

PREMIUM TOURING SUV/CUV PERFORMANCE

The Enhance CX2 is the smart choice for SUV and CUV drivers seeking a tire that's tough enough to handle heavy loads, while still delivering dependable year-round performance.

FEATURES & BENEFITS

- > Sumitomo precision engineering tuned for SUV and crossover applications
- > 3D zig zag sipes boosts block stability and reduce irregular wear while creating more biting edges and improving winter performance
- > Optimized contact patch distributes pressure evenly to provide extended life of the tire
- > Cross-designed chamfer provides more biting edges to provide better winter performance
- > Bending sipes creates rigidity in center block to maintain stability and provide excellent highway response and driving characteristics



3D Zig Zag Sipes boost block stability and reduce irregular wear, while creating more biting edges and improving winter performance

Bending Sipe Technology creates rigidity in center block to maintain stability, while providing crisp highway response and driving characteristics

Optimized Contact Patch distributes road surface pressure evenly to provide extended tire life

Cross-Designed Chamfer boosts traction and grip for better winter and wet-surface performance

Outside Shoulder Blocks are enhanced with integral lateral grooves to provide better wet handling and reduce road noise

FITS

Modern Crossovers and SUVs

SIZES

T, H & V-rated in 16" - 20" and 22"

WARRANTY


65,000-Mile / 105,000-KM Treadwear for all sizes

2-Year, 24/7 Tire Roadside Assistance

1-Year Tire Road Hazard Protection Plan

45-Day Test Drive

Defect Replacement for the Life of Usable Tread

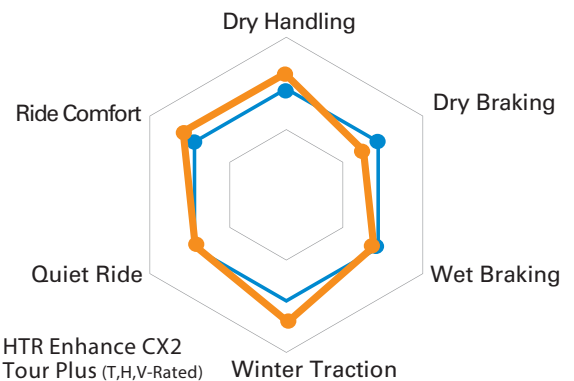

PREMIUM TOURING SUV/CUV PERFORMANCE

Product Code	Tire Size	Load Range	Service Description	UTQG	Measuring Rim Width (in)	Approved Rim Width		Maximum		Overall Diameter (in)	Section Width (in)	Tread Width (in)	Static Loaded Radius (in)	Revs. Per. Mile	Tread Depth	Ship Weight (lbs)
						Min. (in)	Max. (in)	Air (lbs psi)	Load (lbs)							
ENC53	235/70R16	SL	106T	680 A B	7.0	6.0	8.0	51	2,094	29	9.4	7.4	13.0	729	11	31.3
ENC54	245/65R17	SL	107H	680 A A	7.0	7.0	8.5	51	2,149	29.5	9.7	7.8	13.3	719	11	33.5
ENC05	235/65R18	SL	106H	680 A A	7.0	6.5	8.5	51	2,094	30.0	9.4	7.5	13.6	705	11	34.4
ENC32	255/65R18	SL	111T	600 A B	7.5	7.0	9.0	51	2,403	31.1	10.2	8.1	14.0	683	11	38.4
ENC49	235/60R18	XL	107V	600 A A	7.0	6.5	8.5	50	2,149	29.1	9.4	7.8	13.2	726	11	32.2
ENC68	245/60R18	SL	105H	680 A A	7.0	7.0	8.5	51	2,039	29.6	9.7	8.1	13.4	716	11	35.1
ENC81	285/60R18	XL	120H	600 A A	8.5	8.0	10.0	50	3,086	31.5	11.4	9.4	14.1	677	11	43.4
ENC36	255/55R18	XL	109V	600 A A	8.0	7.0	9.0	50	2,271	29.0	10.4	8.8	13.2	728	11	37.5
ENC72	255/60R19	SL	109H	680 A A	7.5	7.0	9.0	51	2,271	31.1	10.2	8.4	14.1	680	11	36.8
ENC86	235/55R19	XL	105V	600 A A	7.5	6.5	8.5	50	2,039	29.2	9.6	8.1	13.4	720	11	33.1
ENC66	245/55R19	SL	103H	680 A A	7.5	7.0	8.5	51	1,929	29.6	9.9	8.5	13.5	711	11	34.4
ENC02	235/50R19	SL	99V	600 A A	7.5	6.5	8.5	51	1,709	28.3	9.6	8.4	13.0	742	11	30.6
ENC09	255/50R19	XL	107V	600 A A	8.0	7.0	9.0	50	2,149	29.1	10.4	9.1	13.3	723	11	34.2
ENC03	235/55R20	SL	102H	680 A A	7.5	6.5	8.5	51	1874	30.2	9.6	8.1	13.9	697	11	34.2
ENC04	255/55R20	XL	110H	600 A A	8.0	7.0	9.0	50	2337	31.0	10.4	8.8	14.2	680	11	38.6
ENC80	245/50R20	SL	102V	600 A A	7.5	7.0	8.5	51	1874	29.7	9.9	8.8	13.7	708	11	34.4
ENC84	255/50R20	XL	109V	600 A A	8.0	7.0	9.0	50	2271	30.1	10.4	9.1	13.8	699	11	35.1
ENC85	265/50R20	XL	111V	600 A A	8.5	7.5	9.5	50	2403	30.5	10.8	9.5	14.0	690	11	38.1
ENC24	305/50R20	XL	120H	600 A A	9.5	8.5	11.0	50	3086	32.0	12.4	10.9	14.6	659	12	51.0
ENC11	275/45R20	XL	110H	600 A A	9.0	8.5	10.5	50	2337	29.8	10.7	9.5	13.7	701	11	35.7
ENC21	P295/45R20	XL	114H	600 A A	10.0	9.5	11.0	50	2601	30.5	11.6	10.2	14.0	685	11	40.8
ENC07	285/45R22	XL	114H	600 A A	9.5	9.0	10.5	50	2601	32.1	11.1	9.9	14.8	648	11	45.8
ENC25	P305/45R22	XL	118H	600 A A	10.0	9.5	11.5	50	2910	32.8	11.9	10.6	15.1	635	12	50.7
ENC06	265/40R22	XL	106H	680 A A	9.5	9.0	10.5	50	2094	30.4	10.6	9.4	14.2	683	11	37.3
ENC27	305/40R22	XL	114H	600 A A	11.0	10.0	12.0	50	2601	31.6	12.2	10.8	14.6	658	11	46.2