

## HTR A/S P03

### HIGH-PERFORMANCE ALL-SEASON

The HTR A/S P03 provides the sporty performance you crave from your vehicle. This all-season, high-performance tire delivers significantly enhanced wet braking distance, superior grip and handling, extended tread life and outstanding winter traction, ensuring your drive will never be the same. Featuring Sumitomo's new, advanced "fin"-shaped tread design, speed ratings in the fastest-growing W-rated segment and 75 sizes with a focus on larger rim diameters, the HTR A/S P03 is ideal for all-season drivers seeking a combination of high performance and impressive handling for their sports car, sedan or crossover.

### FEATURES & BENEFITS

- > Significantly enhanced wet braking, tread life, and ride comfort, while maintaining outstanding dry braking and reduced road noise
- > 3D sipes provide more contact with road surface for improved bite versus standard sipes
- > Silica-enhanced tread compound provides superior wet traction and extended wear performance



**Optimized Tread Design** reduces profile deformation while cornering, providing better handling and stability

**Water Evacuation Channels**, with new "fin" design, reduce hydroplaning risk and provides better water drainage for enhanced wet-weather performance

**Multi-Sipe Technology**, known as "Miura-Ori" sipes, creates less distortion, improving all-weather handling and winter-traction performance

**Cross-Designed Grooves and Sipes** enhance road contact to maximize optimal grip in wintry conditions

### FITS

Sports cars, sedans or crossovers that demand high performance and impressive handling

### SIZES

75 sizes ranging from 15-20" in H, V and W

### WARRANTY

65,000-Mile / 105,000-km Treadwear for H & V-Rated Sizes


45,000-Mile / 72,000-km Treadwear for W-Rated Sizes

2-Year, 24/7 Tire Roadside Assistance

1-Year Tire Road Hazard Protection Plan

Free 30-Day Test Drive

Free Lifetime Replacement for Workmanship and Material Defects

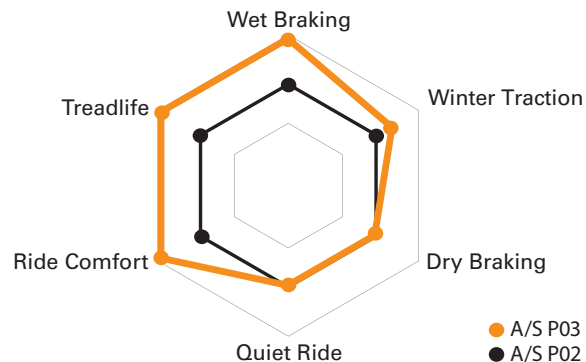

Product Code	Tire Size	Load Range	Service Desc.	UTQG	Measuring Rim Width (in)	Approved Rim Width		Maximum		Overall Dia. (in)	Section Width (in)	Tread Width (in)	Static Loaded Radius (in)	Revs. Per. Mile	Tread Depth	Ship Weight (lbs)
						Min. (in)	Max. (in)	Air (lbs psi)	Load (lbs)							
ASP10	175/65R15	SL	84H	640 A A	5.0	5.0	6.0	51	1102	24.1	7.0	5.6	10.9	878	10	17.9
ASP27	185/65R15	SL	88H	640 A A	5.5	5.0	6.5	51	1235	24.5	7.5	5.9	11.1	864	10	18.7
ASP28	195/65R15	SL	91H	640 A A	6.0	5.5	7.0	51	1356	25.1	8.0	6.2	11.3	844	10	19.4
ASP30	205/65R15	XL	99V	640 A A	6.0	5.5	7.5	50	1709	25.6	8.3	6.5	11.5	831	10	22.5
ASP56	205/65R16	SL	95V	640 A A	6.0	5.5	7.5	51	1521	26.5	8.3	6.5	12.0	798	10	22.9
ASP59	215/65R16	SL	98H	640 A A	6.5	6.0	7.5	51	1653	27.1	8.8	6.9	12.2	783	10	23.8
ASP42	205/60R16	SL	92V	640 A A	6.0	5.5	7.5	51	1389	25.8	8.3	6.8	11.7	818	10	22.1
ASP48	215/60R16	XL	99V	640 A A	6.5	6.0	7.5	50	1709	26.3	8.8	7.1	11.9	806	10	24.6
ASP52	225/60R16	SL	98V	640 A A	6.5	6.0	8.0	51	1653	26.7	9.1	7.4	12.1	792	10	27.6
ASP85	185/55R16	SL	83H	640 A A	6.0	5.0	6.5	51	1074	24.0	7.6	6.4	11.1	873	10	19.4
ASP82	195/55R16	SL	87V	640 A A	6.0	5.5	7.0	51	1201	24.4	7.9	6.7	11.2	863	10	20.4
ASP41	205/55R16	XL	94H	640 A A	6.5	5.5	7.5	50	1477	24.9	8.4	7.1	11.4	846	10	23.1
ASP57	215/55R16	XL	97V	640 A A	7.0	6.0	7.5	50	1609	25.3	8.9	7.4	11.5	834	10	25.1
ASP31	195/50R16	SL	84V	640 A A	6.0	5.5	7.0	51	1102	23.7	7.9	7.0	10.9	887	10	19.4
ASP70*	205/50R16	SL	87V	640 A A	-	-	-	51	1201	24.1	8.1	-	-	863	10	21.1
ASP76	225/65R17	SL	102H	640 A A	6.5	6.0	8.0	51	1874	28.6	9.1	7.2	12.9	741	10	27.8
ASP77	235/65R17	XL	108V	640 A A	7.0	6.5	8.5	50	2205	29.1	9.5	7.5	13.1	729	10	32.5
ASP33	235/60R17	SL	102V	640 A A	7.0	6.5	8.5	51	1874	28.2	9.5	7.8	12.8	751	10	31.3
ASPO3	205/55R17	XL	95V	640 A A	6.5	5.5	7.5	50	1521	25.9	8.4	7.1	11.9	812	10	23.8
ASPO8	215/55R17	SL	94W	540 A A	7.0	6.0	7.5	51	1477	26.3	8.9	7.4	12.0	800	10	22.8
ASP88	225/55R17	XL	101W	540 A A	7.0	6.0	8.0	50	1819	26.8	9.2	7.8	12.2	788	10	25.1
ASP89	235/55R17	SL	99W	540 A A	7.5	6.5	8.5	51	1709	27.2	9.6	8.1	12.4	777	10	28.7
ASP12	205/50R17	XL	93W	540 A A	6.5	5.5	7.5	50	1433	25.1	8.4	7.3	11.6	836	10	23.2
ASP58	215/50R17	SL	91W	540 A A	7.0	6.0	7.5	51	1356	25.5	8.9	7.7	11.7	824	10	26.9
ASP66	225/50R17	SL	94W	540 A A	7.0	6.0	8.0	51	1477	25.9	9.2	8.0	11.9	812	10	23.1
ASP69	235/50R17	SL	96W	540 A A	7.5	6.5	8.5	51	1565	26.3	9.6	8.4	12.0	800	10	26.5
ASP18	245/50R17	SL	99W	540 A A	7.5	7.0	8.5	51	1709	26.7	10.0	8.7	12.2	791	10	28.7
ASP51	205/45R17	XL	88W	540 A A	7.0	6.5	7.5	50	1235	24.3	8.1	7.1	11.3	856	10	21.9
ASP53	215/45R17	XL	91W	540 A A	7.0	7.0	8.0	50	1356	24.7	8.4	7.4	11.4	843	10	21.6
ASP71	225/45R17	XL	94W	540 A A	7.5	7.0	8.5	50	1477	25.0	8.9	7.8	11.5	833	10	22.7
ASP54	235/45R17	SL	94W	540 A A	8.0	7.5	9.0	51	1477	25.4	9.3	8.1	11.7	821	10	23.2
ASP55	245/45R17	XL	99W	540 A A	8.0	7.5	9.0	50	1709	25.7	9.6	8.5	11.8	812	10	25.6
ASP50	245/40R17	XL	95W	540 A A	8.5	8.0	9.5	50	1521	24.7	9.8	8.7	11.4	843	10	24.4
ASPO4	275/40R17	SL	98W	540 A A	9.5	9.0	11.0	51	1653	25.7	10.9	9.8	11.8	812	10	28.7
ASP05	235/65R18	SL	106H	640 A A	7.0	6.5	8.5	51	2094	30.1	9.5	7.5	13.6	703	10	31.6
ASP34	225/60R18	SL	100V	640 A A	6.5	6.0	8.0	51	1764	28.7	9.1	7.4	13.1	735	10	28.3
ASP49	235/60R18	XL	107V	640 A A	7.0	6.5	8.5	50	2149	29.2	9.5	7.8	13.3	723	10	32.4
ASP68	245/60R18	SL	105H	640 A A	7.0	7.0	8.5	51	2039	29.7	9.8	8.1	13.4	714	10	34.4
ASP19	215/55R18	SL	95H	640 A A	7.0	6.0	7.5	51	1521	27.3	8.9	7.4	12.5	771	10	28.1
ASP92	225/55R18	SL	98V	640 A A	7.0	6.0	8.0	51	1653	27.8	9.2	7.8	12.7	758	10	29.9
ASP36	235/55R18	XL	104W	540 A A	7.5	6.5	8.5	50	1984	28.1	9.6	8.1	12.9	748	10	29.5
ASP72*	245/55R18	SL	103W	540 A A	7.0	7.5	8.5	51	1929	28.6	10.0	8.4	13.0	738	10	30.6
ASP26	225/50R18	SL	95W	540 A A	7.0	6.0	8.0	51	1521	26.9	9.2	8.0	12.4	782	10	28.3
ASP13	235/50R18	XL	101W	540 A A	7.5	6.5	8.5	50	1819	27.3	9.6	8.4	12.5	771	10	28.9
ASPO6	215/45R18	XL	93W	540 A A	7.0	7.0	8.0	50	1433	25.7	8.4	7.4	11.9	811	10	22.4
ASP14	225/45R18	XL	95W	540 A A	7.5	7.0	8.5	50	1521	26.0	8.9	7.8	12.0	800	10	23.6
ASPO9	235/45R18	SL	94W	540 A A	8.0	7.5	9.0	51	1477	26.4	9.3	8.1	12.2	790	10	25.5
ASP17	245/45R18	XL	100W	540 A A	8.0	7.5	9.0	50	1764	26.7	9.6	8.5	12.3	782	10	28.5
ASP78	225/40R18	XL	92W	540 A A	8.0	7.5	9.0	50	1389	25.1	9.1	8.0	11.7	827	10	23.6
ASP83	235/40R18	XL	95W	540 A A	8.5	8.0	9.5	50	1521	25.4	9.5	8.3	11.8	818	10	24.7
ASP75	245/40R18	XL	97W	540 A A	8.5	8.0	9.5	50	1609	25.7	9.8	8.7	11.9	809	10	24.9
ASPO7	255/40R18	XL	99W	540 A A	9.0	8.5	10.0	50	1709	26.0	10.2	9.1	12.0	800	10	28.2
ASP24	255/35R18	XL	94W	540 A A	9.0	8.5	10.0	50	1477	25.0	10.2	9.1	11.7	830	10	26.1
ASP21	225/55R19	SL	99V	640 A A	7.0	6.0	8.0	51	1709	28.8	9.2	7.8	13.2	730	10	27.1
ASP86	235/55R19	XL	105W	540 A A	7.5	6.5	8.5	50	2039	29.2	9.6	8.1	13.4	720	10	34.4
ASP67	245/55R19	SL	103H	640 A A	7.5	7.0	8.5	51	1929	29.6	10.0	8.4	13.5	711	10	35.4
ASP32	255/50R19	XL	107W	540 A A	8.0	7.0	9.0	50	2149	29.1	10.4	9.1	13.3	723	10	34.2
ASP15	225/45R19	SL	92W	540 A A	7.5	7.0	8.5	51	1389	27.0	8.9	7.8	12.6	768	10	24.2
ASP23	235/45R19	XL	99W	540 A A	8.0	7.5	9.0	50	1709	27.4	9.3	8.1	12.7	760	10	25.3
ASP94	245/45R19	SL	98W	540 A A	8.0	7.5	9.0	51	1653	27.7	9.6	8.5	12.8	752	10	28.4
ASP11	255/45R19	SL	100V	640 A A	8.5	8.0	9.5	51	1764	28.1	10.0	8.8	13.0	742	10	31.0
ASP98	235/40R19	XL	96V	640 A A	8.5	8.0	9.5	50	1565	26.4	9.5	8.3	12.3	785	10	23.7
ASP81	245/40R19	SL	94W	540 A A	8.5	8.0	9.5	51	1477	26.7	9.8	8.7	12.4	777	10	30.0
ASP39	255/40R19	XL	100W	540 A A	9.0	8.5	10.0	50	1764	27.0	10.2	9.1	12.6	768	10	28.4
ASPO2	275/40R19	SL	101W	540 A A	9.5	9.0	11.0	51	1819	27.7	10.9	9.8	12.8	752	10	31.0
ASP35	255/35R19	XL	96W	540 A A	9.0	8.5	10.0	50	1565	26.0	10.2	9.1	12.2	797	10	26.6
ASP25	235/55R20	SL	102H	640 A A	7.5	6.5	8.5	51	1874	30.2	9.6	8.1	13.9	697	10	33.1
ASP29	245/50R20	SL	102V	640 A A	7.5	7.0	8.5	51	1874	29.7	10.0	8.7	13.7	708	10	34.7
ASP93	245/45R20	XL	103W	540 A A	8.0	7.5	9.0	50	1929	28.7	9.6	8.5	13.3	724	10	29.6
ASP22	255/45R20	XL	105W	540 A A	8.5	8.0	9.5	50	2039	29.1	10.0	8.8	13.5	715	10	29.9
ASP38	245/40R20	SL	95V	640 A A	8.5	8.0	9.5	51	1521	27.7	9.8	8.7	12.9	749	10	29.6
ASP65	275/40R20	XL	106W	540 A A	9.5	9.0	11.0	50	2094	28.7	10.9	9.8	13.3	725	10	33.8
ASP43*	245/35R20	XL	95W	540 A A	8.5	8.0	9.5	50	1521	26.8	9.8	8.8	12.6	774	10	27.1
ASP20*	255/35R20	SL	97W	540 A A	-	-	-	51	1609	27.0	10.0	-	-	768	10	28.0
ASP37	275/35R20	XL	102W	540 A A	9.5	9.0	11.0	50	1874	27.6	10.9	9.8	12.9	752	10	31.1

\*Coming Soon